

A Major Advance for Protecting Product and Equipment from Metal Scrap

Bunting Machine-Mounted All-Metal Separators

Bunting® Machine-Mounted All-Metal Separators Take Tramp Metal Protection to a New Level

Safeguard Your Product and Process

Our new Machine-Mounted All-Metal Separators elevate product and equipment protection to a new level for plastics processors. They can bolt directly above the throats of processing machinery and are specifically designed to reject both ferrous and nonferrous metal contaminants in slow-moving "choke feed" applications.

Remove All Metal Contaminants

Growing substitution of reground plastics for increasingly expensive virgin material increases the potential for damage and adulteration from tramp metal. But now you can effectively defend against the increased risk. Bunting® Machine-Mounted All-Metal Separators reject all conductive metal contaminants, including iron, stainless steel, aluminum, copper, brass, nickel, and even lead.



Always Your Best Choice...We'll Prove It!

 **BUNTING® Magnetics Co. Europe**

Magnet Applications Ltd.

Northbridge Road, Berkhamsted, Herts HP4 1EH UK

Tel: +44 (0) 1442291702 • Fax: +44 (0) 1442875009



email: bmc@buntingmagnetics.com • www.buntingmagnetics.com

Find ALL of your Metal Detection products at www.buntingmagnetics.com



Protect Your Product and Processing Equipment Against All-Metal Contaminants

Install in New Systems or Retrofit

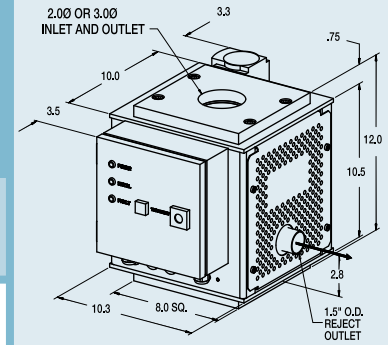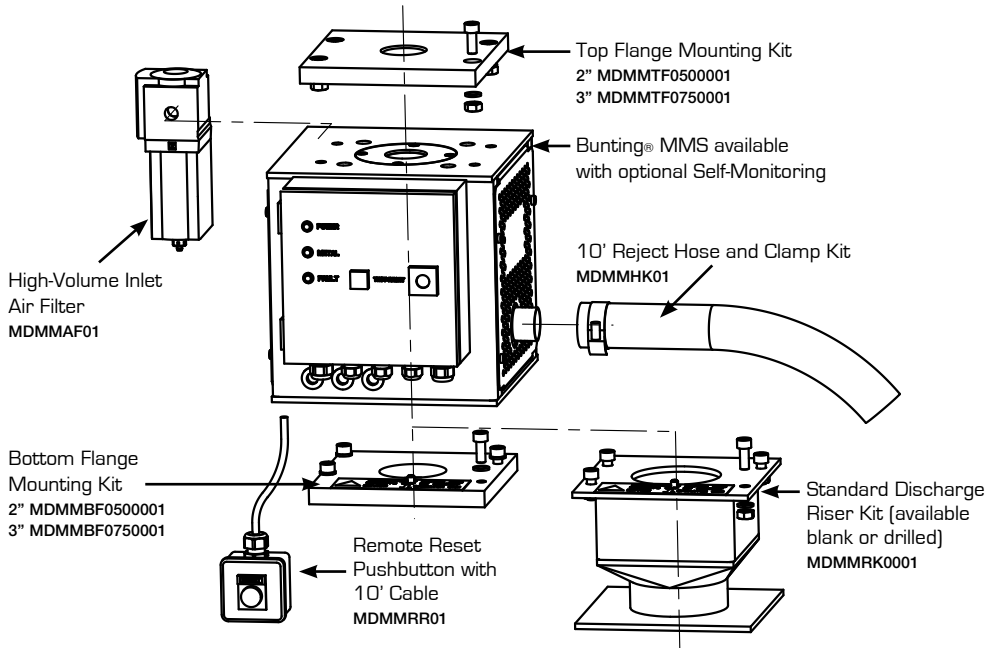

SHOWN WITH RECOMMENDED AIR FILTER AND TOP AND BOTTOM FLANGE ADAPTERS

Equipment Part Numbers

Base Unit:

Part Number	Description
MDMM30050001	2" (50mm) Machine Mount Separator
MDMM30050002	2" (50mm) Machine Mount Separator w/self-monitoring
MDMM30075001	3" (75mm) Machine Mount Separator
MDMM30075002	3" (75mm) Machine Mount Separator w/self-monitoring

Accessories: listed separately on sales order

Part Number	Description
MDMMTF0500001	2" top flange mounting kit-blank
MDMMTF050_ _ _ _	2" top flange mounting kit-drilled
MDMMBF0500001	2" bottom flange mounting kit-blank
MDMMBF050_ _ _ _	2" bottom flange mounting kit-drilled
MDMMTF0750001	3" top flange mounting kit-blank
MDMMTF075_ _ _ _	3" top flange mounting kit-drilled
MDMMBF0750001	3" bottom flange mounting kit-blank
MDMMBF075_ _ _ _	3" bottom flange mounting kit-drilled
MDMMAF01	high volume inlet air filter
MDMMRR01	remote reset pushbutton with 10' cable
MDMMHK01	10' reject hose and clamp kit
MDMMRK0001	std discharge riser kit-blank
MDMMRK_ _ _ _	(8" sq x 4" high) std discharge riser kit-drilled

Test Sticks Available

Bunting® Machine-Mounted All-Metal Separators Yield Exceptionally Pure, High-Quality Product

Our Machine-Mounted Separators are specially engineered, highly sensitive electronic metal detectors designed specifically for the plastics industry. They react to all conductive metals and reject particles as small as 0.5 mm to give you outstanding protection for your equipment and for the purity of your product. The unit's venturi-driven vacuum reject mechanism features an extremely fast-acting pneumatically driven slide gate. Some separators have a blind spot in their rejection cycle that lets tramp metal slip past. But our design prevents this occurrence and results in superior rejection performance that boosts overall efficiency and reduces the risk of costly machine damage.

Specifications are subject to change without notice.

High-Temperature MMS model also available



- Separators install directly above infeed.
- Rugged housings allow mounting other equipment.
- Precise timing results in accurate cycling.
- Fast pneumatic reject mechanism reduces good product waste.
- Slide gate rejection design eliminates contaminant "leaks".
- Handles temperatures up to 350° degrees

Bunting® Hi-Temp Machine-Mounted All-Metal Separators

A Major Advance for Protecting Product and Equipment from Metal Scrap

The Bunting® High-Temp Machine-Mounted All-Metal Separator provides efficient rejection of both ferrous and nonferrous metal contaminants. The MMS is designed especially for choke-feed applications where the product is at a higher than normal temperature. It bolts directly to the in-feed of processing equipment and supports the weight of hoppers and other auxiliary equipment. A fast pneumatic rejection mechanism aided by precise timing results in accurate cycling and conservation of good material



- Separators install directly above infeed.
- Rugged housings allow mounting other equipment.
- Precise timing results in accurate cycling.
- Fast pneumatic reject mechanism reduces good product waste.
- Slide gate rejection design eliminates contaminant "leaks".
- Handles temperatures up to 350° degrees



Always Your Best Choice...We'll Prove It!

 **BUNTING** Magnetics Co. Europe

Magnet Applications Ltd.

Northbridge Road, Berkhamsted, Herts HP4 1EH UK

Tel: +44 (0) 1442291702 • Fax: +44 (0) 1442875009

email: bmc@buntingmagnetics.com • www.buntingmagnetics.com

Find ALL of your magnetic separation products at www.buntingmagnetics.com